SPECIFICATION SHEET

KUBASIK

Distributed exclusively by ISCA

www.iscahps.com · +1 240 800 4021

Column Dumper

ART. NO. 9620300



A mobile column dumper that lifts and tips 200, 400 and 600 lb dump buggies into downstream process equipment. Max tipping height is adjustable from 64.6" to 88.2" (1640–2240 mm) to suit your application.


SPECIFICATION	COLUMN DUMPER
Controls / orientation	Hold-to-run push buttons / right-hand side
Stainless steel	AISI 304
Lifting capacity	660 lbs
Max tipping height	Adjustable See description above
Tipping reach	Customized to your application, with a chute if required
Tipping angle	135° (45° from horizontal)
L × W × H	57 × 51 × 111.4" 1449 × 1292 × 2830 mm
Overall machine height	111.4"
Container suitability	Dump buggy 200, 400 + 600 lb (or similar container)
Base	Mobile base as std
Mains supply (std)	240 V, 3PH, 60 Hz – grounded
Control circuit	24 V AC
Electrical rating	IP55
Drive type	Braked motor gearbox + roller chain
Lift speed	21 ft/min
Approx. net weight	660 lbs

KEY FEATURES

- AISI 304 stainless, sandblasted
- Welded body construction
- Braked motor gearbox + roller chain
- Hold-to-run push-button controls
- Detachable mobile base (std)
- Adjustable tipping height

GENERAL ARRANGEMENT

Sales drawing · dimensions in inches (mm)

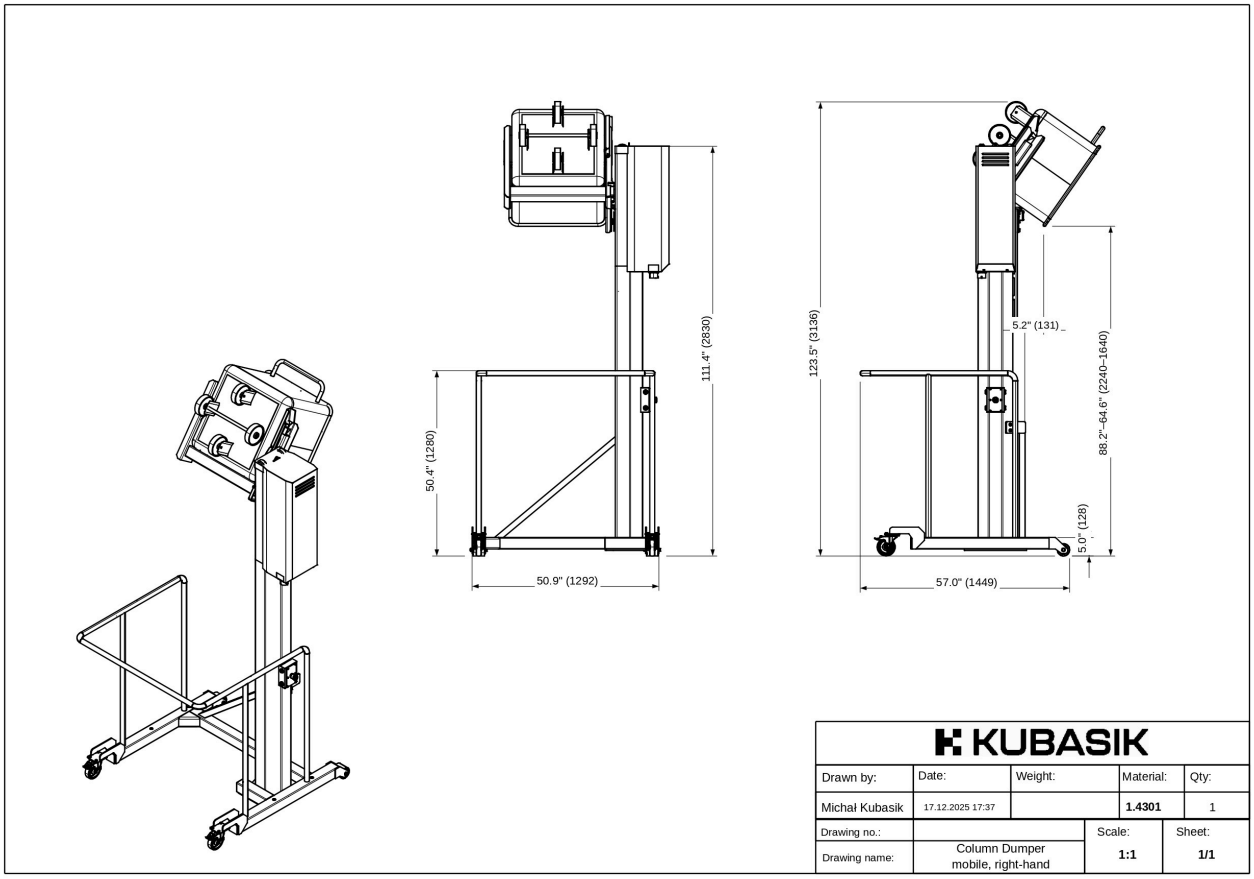

MAX TIPPING HEIGHT
64.6–88.2"
adjustable, 1640–2240 mm

TIPPING ANGLE
135°
45° from horizontal

LIFTING CAPACITY
660 lbs
200 / 400 / 600 lb buggies

LIFT SPEED
21 ft/min
braked motor + roller chain



TAILORED TO YOUR APPLICATION

Adjustable tipping height

Chute for extra reach

Detachable mobile base

Tipping height is adjustable, tipping reach can be extended with a chute, and the standard mobile base can be disconnected.

Please ask about these options on our inquiry form.