SPECIFICATION SHEET

KUBASIK

Distributed exclusively by ISCA

www.iscahps.com · +1 240 800 4021

Dump Buggy Tipper

ART. NO. 1630010100



PRODUCTION LINE AUTOMATION

A mobile hydraulic tipper that lifts and discharges 200, 400 and 600 lb dump buggies into downstream process equipment, with a standard tipping height of 46.4" that can be adjusted to suit your application.


SPECIFICATION	DUMP BUGGY TIPPER
Controls / orientation	Hold-to-run push buttons / left-hand side
Stainless steel	Grade 304
Lifting capacity	660 lbs
Std tipping height	46.4" (1178 mm) Can be modified to suit your application
Tipping reach	Customized to your application, with a chute if required
Tipping angle	30° past the horizontal
Container suitability	Dump buggy 200, 400 + 600 lb (or similar container)
Base	Mobile base
L × W × H (rest position)	38.8 × 54.4 × 56.4" 985 × 1381 × 1433 mm
Mains supply (std)	240 V, 3PH, 60 Hz
Control circuit	24 V AC
Electrical rating	IP55
Drive type	Hydraulic power pack

KEY FEATURES

- Grade 304 stainless steel construction
- Sandblasted surface, strong welded body
- Hydraulic power pack drive
- Hold-to-run push-button controls
- Mobile base for easy repositioning
- Tipping height and reach tailored to your line

GENERAL ARRANGEMENT

Sales drawing 1630010100 · dimensions in inches (mm)

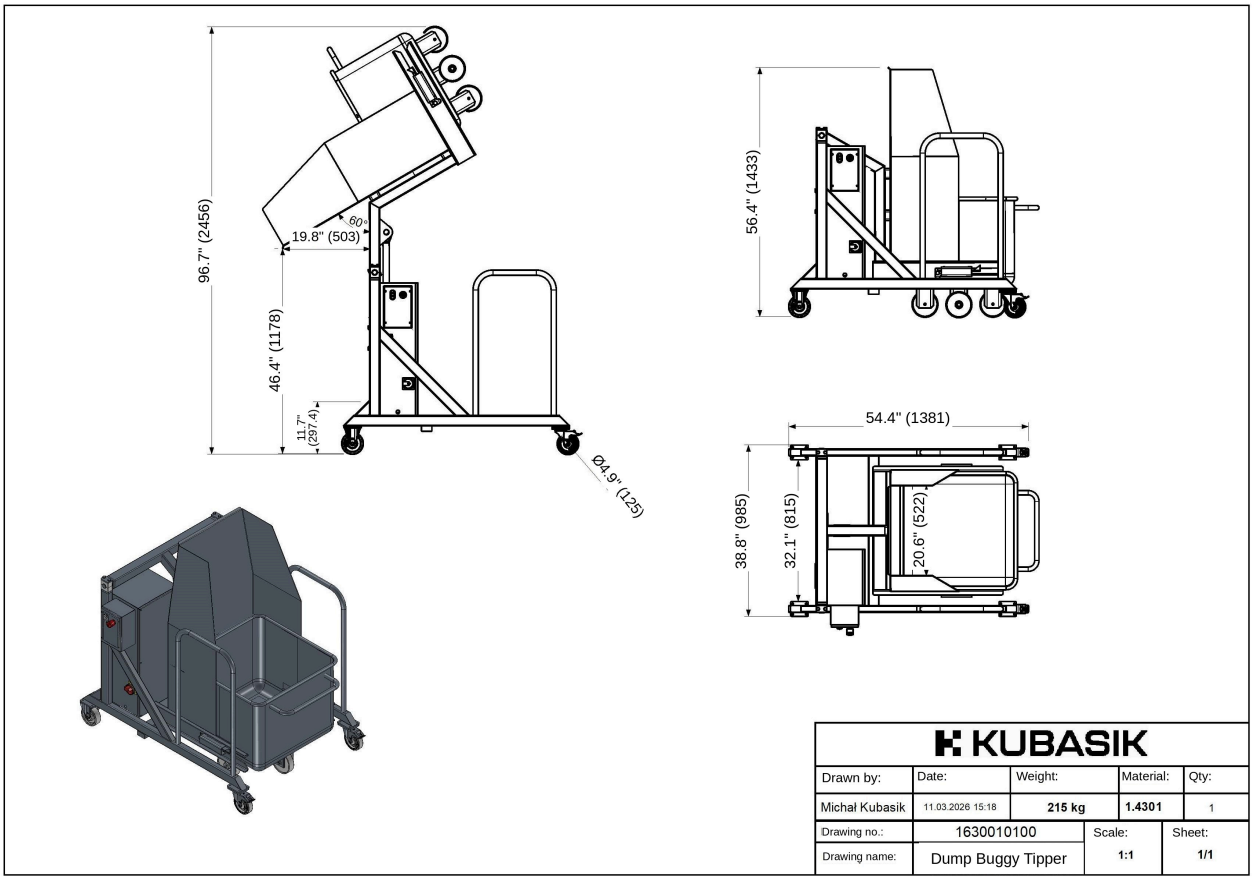

STD TIPPING HEIGHT
46.4"
1178 mm

TIPPING ANGLE
30°
past the horizontal

LIFTING CAPACITY
660 lbs
200 / 400 / 600 lb buggies

L × W × H (REST)
38.8 × 54.4 × 56.4"
985 × 1381 × 1433 mm



CUSTOMIZATION OPTIONS

- **Guarding**
- **Fixed base**
- **Battery driven**

Tipping height can be modified and tipping reach customized with a chute to suit your application.

Please ask about these options on our inquiry form.